

# TVGP-M01-0402-DOM-G

TruVision 4MP, H.265+, Smart IP Dome camera, 40 m IR, 2.8 to 12 mm lens, grey

## Overview

---

The TruVision M-series IP dome cameras leverages the latest H.265+ video compression technology to bring state-of-the-art, high-definition pictures to the mass video surveillance market. With video resolutions from 2 Megapixel to 4K, these IP cameras represent a flexible video surveillance device to meet any need. Equipped with advanced technology and signal processing capability, they effectively capture video under challenging conditions.

The cameras go above and beyond standard motion detection with enhanced alarm capabilities, including cross line detection, intrusion detection and face detection features. With its smart person/vehicle feature the camera can ignore irrelevant motion or VCA events which will automatically lead to less storage consumption and faster retrieval of relevant video events.

TruVision cameras utilize H.265+ and/or H.264 compression technology with triple-streaming capability, making it easy to manage the camera's bandwidth usage. Recording to a local MicroSD card (not included) protects data in the event of network disruptions.



## Details

---

- Maximum resolution: 4MP (2688 x 1520)
- Motorized zoom lens 2.8 to 12 mm
- Person/vehicle classification
- Video intelligence: intrusion detection, cross line detection, face detection
- Up to 40 m IR illumination
- H.265+ compression
- ONVIF Profile G, S, T open standards
- Edge recording up to 256 GB SDHC card

# TVGP-M01-0402-DOM-G

TruVision 4MP, H.265+, Smart IP Dome camera, 40 m IR, 2.8 to 12 mm lens, grey

## Technical specifications

### General

Technology	IP
Video standard	NTSC, PAL
Image settings	Hallway View, Mirror, ROI (Region Of Interest)
Privacy masking	Yes
Software compatibility	Milestone XProtect, OnGuard, TruVision Navigator, TVRmobile, Web Browser

### Camera

Sensor size	1/3"
Max. resolution	4 MP
Sensor scan	Progressive
Sensor type	CMOS
Shutter time	1/3 to 1/100,000 s

### Lighting performance

WDR type	True WDR
WDR	120 dB
Digital noise reduction	3D DNR
Day/night	True Day/Night
Motorized IR cut filter	Yes
Color sensitivity	Color: 0.005 Lux @ (F1.6, AGC ON), 0 Lux with IR on
Infrared (IR)	Yes
IR range	Up to 40 m
IR wavelength	850nm

### Encoding

Video streams	3
Main stream compression	H.264, H.265, H.265+
Sub stream compression	H.264, H.265, MJPEG
Third stream compression	H.264, H.265
Video bit rate	32 to 8 Mbps
Main stream resolutions	1280 x 720 (XVGA), 1920 x 1080 (1080p), 2688 x 1520
Sub stream resolutions	640 x 360 (nHD), 640 x 480 (VGA)
Third stream resolutions	1280 x 720 (XVGA), 640 x 360 (nHD), 640 x 480 (VGA)
Max. resolution @ fps	2688 x 1520 @ 25/30 fps

### Lens

Lens type	Varifocal motorized
Focal length	2.8 to 12 mm, horizontal FoV 95.8° to 29.2°, vertical FoV 50.6° to 16.4°, diagonal FoV 114.6° to 33.4°
f-stop	F1.6
Auto iris	No
Auto focus	Yes
Motorized zoom	Yes

### Network

Network interface	RJ-45 10/100 Mbps self-adaptive Ethernet interface
Integration	ONVIF Profile G, ONVIF Profile S, ONVIF Profile T
Supported network protocols	802.1x, Bonjour, DDNS, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, NTP, PPPoE, QoS, RTCP, RTP, RTSP, SMTP, SNMP, TCP/IP, UPnP

### Audio

Audio compression	G.711alaw, G.711ulaw, G.722.1, G.726, MP2L2, MP3
Audio in	1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 KΩ
Audio out	1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 Ω

### Alarm I/O

Alarm inputs	1
Alarm outputs	1 (max. 12 VDC, 30 mA)
Alarm I/O connection	Terminal block

### Storage

Local storage type	Built-in Micro SD/SDHC/SDXC card slot
Max. SD card capacity	256 GB

### Video intelligence

Alarm trigger	HDD error, HDD full, Invalid login, IP address conflict, Motion detection, Network disconnected, Video tampering
ROI	Support 1 fixed region for main stream and sub-stream
Smart event	Advanced motion detection, Face detection, Intrusion detection, Line crossing detection, Motion detection
Intelligence options	Person/vehicle detection on motion, line crossing and intrusion detection

### Electrical

Operating voltage	12 VDC, 0.88 A, PoE: (802.3af, 36 to 57 V), 0.35 to 0.22 A
Power consumption	max. 12.5 W

### Physical

Physical dimensions	Ø153.3 × 111.6 mm Ø6.1 × 4.4 in.
Net weight	880 g 1.9 lb.
Shipping weight	1419 g 3.1 lb.
Colour	Grey
Form Factor	Dome

# TVGP-M01-0402-DOM-G

TruVision 4MP, H.265+, Smart IP Dome camera, 40 m IR, 2.8 to 12 mm lens, grey

## Environmental


Vandal proof	Yes
Impact rating	IK10
Environment	Outdoor
Operating temperature	-30 to +60°C -22 to +140°F
Relative humidity	<95% noncondensing
IP rating	IP67

## Regulatory

Compliance	CE, FCC, REACH, RoHS, UL, WEEE
------------	--------------------------------

## Compatible products

Category	Reference	Description
Brackets & Mounts	TVD-BB4	TruVision Back Box for S6 and M Series varifocal dome cameras, grey
Brackets & Mounts	TVD-CB7	TruVision Cup Base (6 inch) for S6 motorized dome cameras, use with TVD-SNB, TVD-PPB, TVD-CBW
Brackets & Mounts	TVD-CB9	TruVision Cup Base for S7 outdoor dome camera
Brackets & Mounts	TVD-CBW	TruVision wall mount bracket compatible with TruVision Cup Bases TVx-CBx
Brackets & Mounts	TVD-M-PMA-SS	TruVision Pole Mount Adaptor, stainless steel
Brackets & Mounts	TVD-PPB	TruVision Dome Pendant Ceiling mount bracket for TVD-CBx, TVF-CBM
Brackets & Mounts	TVD-SNB	TruVision Dome Swan Neck bracket for TVD-CBx and TVF-CBM cup bases
Brackets & Mounts	TVD-SNB-BB	TruVision TVD-SNB back box, 4-directional conduit, indoor & outdoor
Brackets & Mounts	TVD-VFM3	TruVision flush mount for S6 and M Series varifocal dome IP cameras
Camera Housing	TVD-BS-5S	TruVision Dome Bubble Spare, Smoked, for motorized lens domes

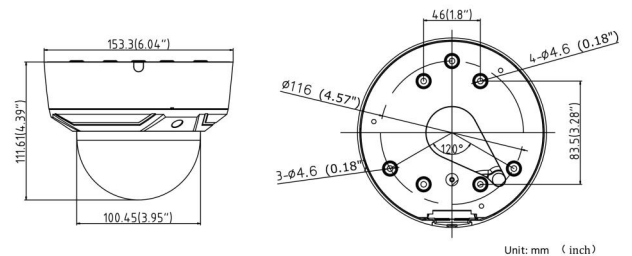

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 18 October 2024 - 13:47