BLAUPUNKT

User Manual

Wireless solar power siren BP-WSSIR01-868

Enjoy it.

1. Brief

Wireless solar power siren is a kind of alarm device with strong popularity.
It communicate with alarm panel, detector, remote etc.
Which work with the same frequency as the siren and achieve flash light and
alarm sound when alarm happen. This siren has anti-tamper function to avoid
intentional damage or dismantle. When alarm happens it make high alarm sound.

Appearance

2. Technical parameter

Static current: <12mA
Transmit /Receiving distance: 100m (in open area)
Transmit /Receiving frequency: 433MHz/868MHz
Alarm current: < 500 mA
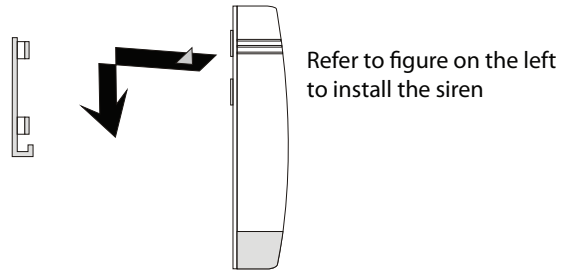Alarm volume: around 100dB

3. Installation

3.1 Base:

2.4 -- 4.8 meter above groud

Mounting hole

A. Mark drill hole and drillon the wall

B. Attach the base to the wall by screws

Mounting hole

3.2 Installation

Refer to figure on the left to install the siren

4. Wiring

Wried terminal and LED

LED	Meaning
D1-D8	Status
D9	Coding
D10	Code clearing

Tamper
Siren output

Battery power input
Exteral power supply（DC12V）/Solar power input

D1 D2 D3 D4 D5 D6 D7 D8 D9 D10

Button

SAVE   1   2
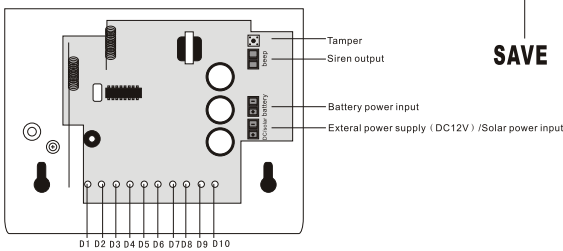
5. Enrolling

Enroll to panel:
Enter into the coding mode of the panel, Press [SAVE] key on the siren till coding LED is blinking. The siren will have sound confirmation when enroll successful.
Enroll to other Wireless devices:
Press the[SAVE] till coding LED is blinking.
Then trigger the wireless device coding key (such as tamper switch).
The siren will sound to confirm that enroll is successful.
Coding clear:
Press the both buttons of [1 2],The yellow LED will lights on 3 seconds then blink for 10 seconds and the lights will be on steady.
That means all the codes has been cleared.

For Inquiries, Please contact:

Security Shop
Vladimira Popovica 6/6/A606
11070 Novi Beograd, Serbia
Tell: +381 11 318 68 68
office@securityshop.rs

Imported/Distributed by Security Shop doo
license of Blaupunkt
www.blaupunkt.com
Made in China